


Dreams

Dreams OWNERS MANUAL

SLEEPMOTION 400i KD

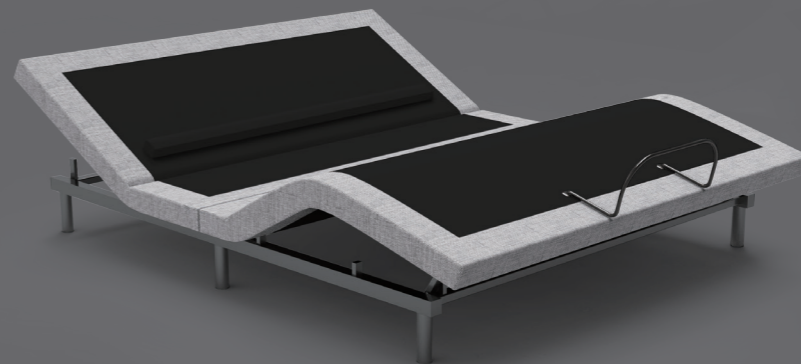

THANK YOU

Thank you for choosing the Sleepmotion 400i bed from Dreams. You have made a sound investment in our high quality Sleepmotion 400i which will hopefully help you relax & sleep better for many years to come. Please take a few minutes to read through this guide which will aid with assembling the product and how to use the features and benefits on the Sleepmotion 400i.

WARNINGS

IMPORTANT: PLEASE READ ALL SAFETY INSTRUCTIONS THOROUGHLY BEFORE USING THIS PRODUCT. PLEASE SAVE THESE INSTRUCTIONS IN A SAFE PLACE. FOR FUTURE REFERENCE.

ENSURE THIS PRODUCT IS PLACED ON A FLAT, CLEAN, DRY SURFACE.

ELECTRICAL SAFETY.

Always connect this product to a grounded surge protector and grounded standard 120-volt circuit wall outlet. DO NOT OPERATE THIS PRODUCT WHEN ANY OF THE CORDS OR ELECTRICAL UNIT IS DAMAGED. Keep all cords away from moving parts and any heated surfaces. FOR INDOOR USE ONLY. When moving or cleaning this product, turn off all electrical functions prior to unplugging from wall outlet.

SMALL CHILDREN/PETS

Immediately dispose of all packaging materials as soon as the product is unpacked. DO NOT ALLOW CHILDREN OR PETS TO PLAY ON OR UNDER THE BED. CHILDREN SHOULD NOT OPERATE THIS PRODUCT WITHOUT ADULT SUPERVISION.

IN-HOME USE / HOSPITAL DISCLAIMER

This product is designed solely for in-home use. This product is not designed to use as a hospital bed and does not meet hospital standards. Do not use with oxygen equipment or near explosive/flammable gases.

WEIGHT RESTRICTIONS

Recommended weight restrictions for PowerBases:
(all weights include the weight of the mattress and bedding)

This product will support the recommended weight limits when weight is distributed evenly across the base. This product is not designed to support or lift this amount in the head or foot sections alone. Consumers should not enter or exit the bed when any portion of it is in the raise position. Do not sit on the head or foot sections while in the raised position. Exceeding the recommended weight restrictions or other misuse of this product could damage the bed and void the warranty.

Weight Capacity: 355 kgs.


SOUND

Sounds does not exceed <70 DB.



Caution

*When raising or lowering the bed, Do Not allow persons or animals to enter or place limbs in the area under the raised components OR When the bed is motion.
Pressing any button on the remote control will stop the operation.*



PRODUCT RATINGS

IMPORTANT: USE THIS PRODUCT ONLY AS DESCRIBED IN THESE INSTRUCTIONS. DO NOT MODIFY ANY PARTS OR COMPONENTS.

MOTOR RATINGS

The Sleepmotion base motors are not designed to operate for more than two (2) continuous minutes within an eighteen (18) minute time period. Exceeding this rating will shorten the life of the motors, and will void the warranty.

POWER RATINGS

INPUT: AC 100-240V-50/60HZ, 1.5 Amp

OUTPUT: DC 29V-2A

FUSE: 1.5A 250V

If a short circuit should occur, switch off and remove the plug from the wall. The customer should seek professional assistance from a qualified electrician. DO NOT open any of the motor components, alter or change any wiring, modify the base, or change the product in any way, as it will void the warranty.

FCC COMPLIANCE

Operates on 2.4 GHz frequency transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To comply with the FCC RF exposure requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirement and void users right to operate the device.

For any questions or concerns regarding this product please visit our Help Centre on the Dreams website:

www.dreams.co.uk

CONTENTS

This is a Sleepmotion base, which includes the functions of back up/down, lumbar up/down, foot up/down, back/foot massage, zero gravity and flat. Also, it could be controlled by wireless remote and Napp application.

Please prevent the children from playing or operating the Sleepmotion base alone.

Overview.....	1-2
Assembly / Remote Control	3-16
Test All Functions	17-18
Electronic Components Information	19-20
Warranty / Electronic Components	21-22
APP	23-24
Additional Trouble Shooting	25-28

OVERVIEW













STEP 1

Place the bed box in a desired location with the top of the box facing up.

STEP 2





Before discarding the packing materials, check to make sure all parts are included.
All electronics and components are located in boxes under the base or attached to the frame.

Note: Due to the weight this product is a 2 person build, to prevent injury please make sure there are 2 people present when assembling this product.

A	Bed Base		2 pcs	F	Legs		each 8 pcs
B	Retainer Bar		1 pc	G	Power Cord		1 pc
C	Transformer		1 pc	H	AAA Battery		2 pcs
D	Wireless Remote Control		1 pc	I	Connecting Bolt		6 pcs
E	Washer		8 pcs	J	Hex Wrench		1 pc
				K	Connecting Plate		3 pcs
				L	Pairing Cable		1 pc

ASSEMBLY

Contents:

A	Bed Base		2 pcs
K	KD Connecting Plate		3 pcs
I	Bolts (1)		6 pcs
J	Hex Wrench		1 pc


STEP 3

Slide the head piece and the foot piece of the bed together so that the holes line up. Refer to image (i).

STEP 4

Align the holes of the Connecting Plates (K) and Bed Base (A). Secure by tightening Bolts (I) with Wrench (J). Refer to image (ii)/(iii).


i

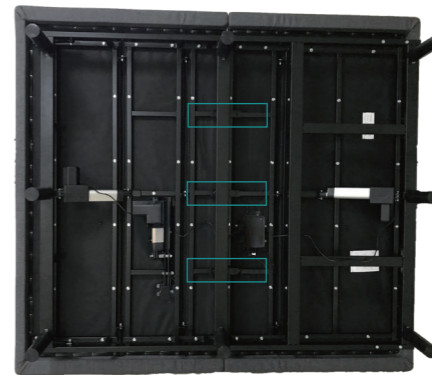





ii

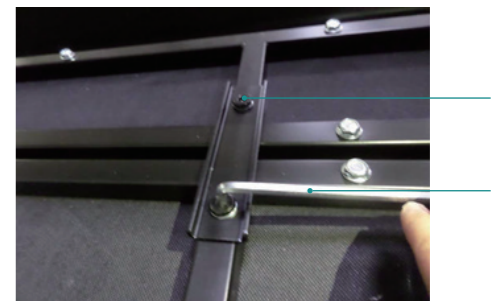

iii



ASSEMBLY

A	Bed Base		2 pcs
E	Washer		8 pcs
F	Legs	 + 	each 8 pcs

There is a variable height option on the Sleepmotion 400i, either 6" or 9". If you would like 6" please just use the larger leg supplied.

If you would like 9" please connect the smaller leg (3") to the larger leg (6") before following the steps below.

If you have a headboard option use the specific holes in image(iv).

STEP 5

Place washer (E) on the leg (F), and then connect to bed base (A). Refer to image (i/ii/iii).

Note:


If you have purchased the Sleepmotion 400i as part of a bedframe please refer to the bed assembly instructions on what leg height to use.

The 3" leg should not be used individually.

i



i

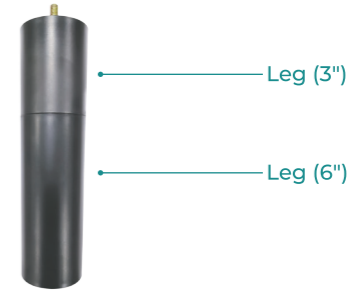

iii



iv




ASSEMBLY




STEP 6

Connect cable from foot motor to foot motor input slot in control box (both cable and input slot are labelled with green sticker).

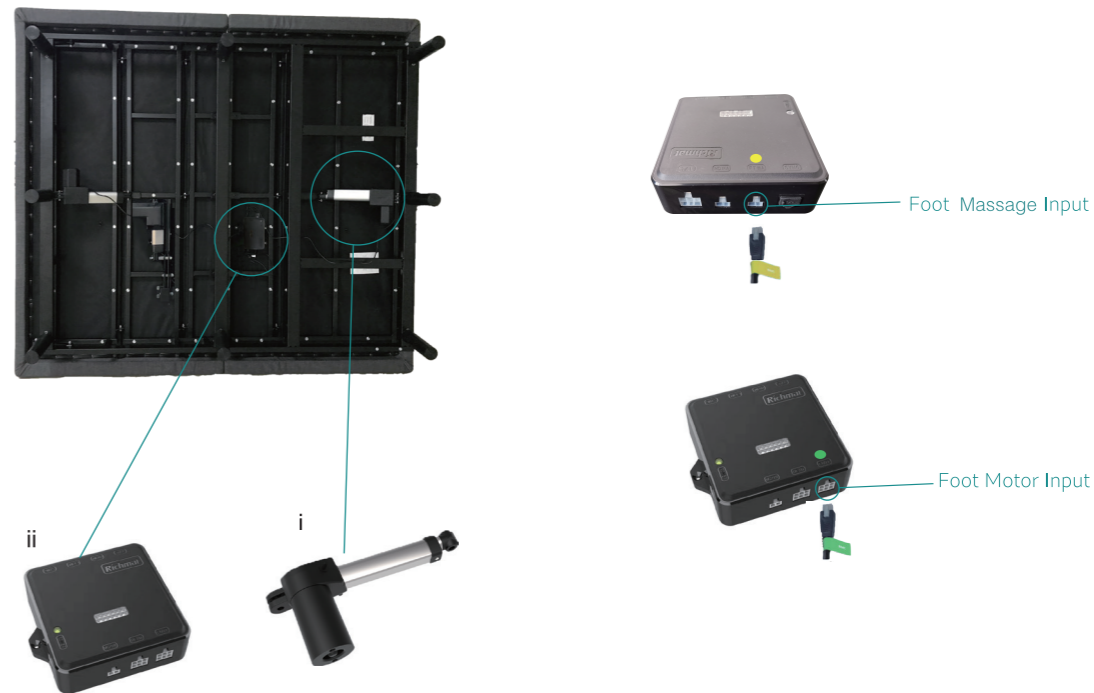Please refer to the image (i)/(ii).



ASSEMBLY


L	Pairing Cable		1 pc
C	Transformer		1 pc
G	Power Cord		1 pc

STEP 7



Insert Pairing Cable(L) into Transformer (C). Refer to image (i).

STEP 8

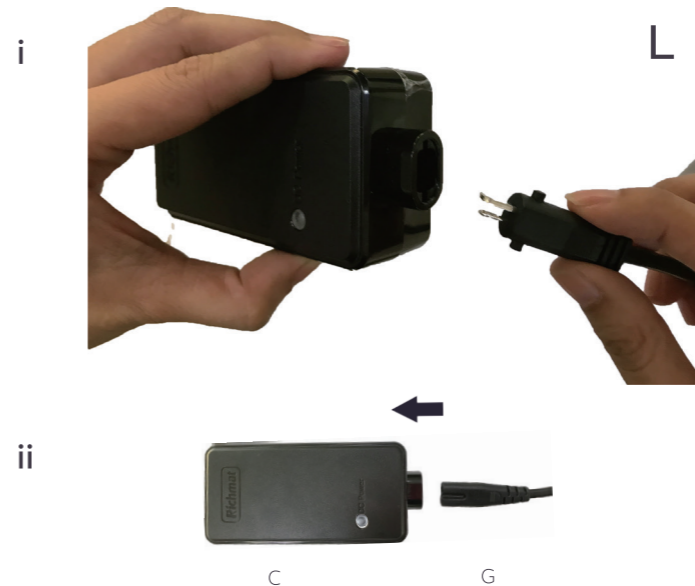Insert Power Cord (G) into Transformer (C). Refer to image (ii).



REMOTE CONTROL


D	Wireless Remote Control		1 pc
H	AAA Battery		2 pcs

OVERVIEW

All of the bed functions are controlled from the Remote Control (D). The Remote Control (D) comes with some pre-set positions. Refer to image (i) for a complete list of remote control functions.

REMOTE CONTROL BATTERY INSTALLATION:

Remove the battery cover on the back of Remote Control (D). Insert the AAA Batteries (H).

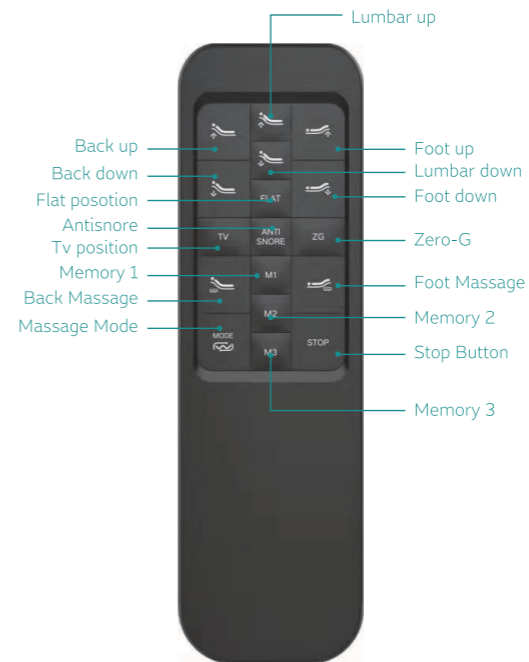

Note: The Zero-G and Flat buttons shown above are pre-programmed with the manufactures suggested bed positions. No programming is necessary by the user.

PRESS ANY BUTTON ON THE REMOTE TO STOP THE MOTION.

REMOTE CONTROL

PARING SET UP

1. Insert Power cable (G) into wall outlet to make sure there is power to the Sleepmotion 400i.
2. Press and hold the "Back down" and "Foot up" buttons simultaneously.
3. Press the the Pair/Flat button on the pairing cable once.
4. Once you hear bleeping sound from control box, paring done.
5. If the remote does not paired, check the remote control batteries and repeat the process.

Note:

This bed can also be controlled via the Dreams App 'Napp by Dreams'. Please see page 23- 24 for instructions.



ASSEMBLY

A Bed Base



1 pc

B Retainer Bar



1 pc

STEP 9

Turn over the whole base with legs standing on the floor, this is a 2 man lift. Please refer to image (i). Hold the metal frame when turning over the base, do not hold the upholstered frame only.


STEP 10

Insert the retainer bar (B) into 2 holes on the foot end of Bed Base (A). Refer to image (ii).

i



ii

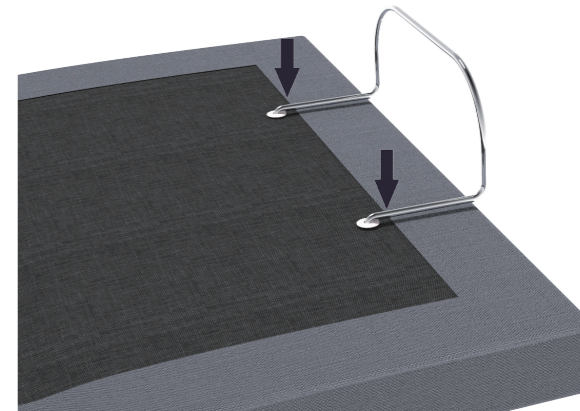

TEST ALL FUNCTIONS


OVERVIEW

To ensure proper setup, use remote and test all functions for three (3) seconds.

Note :

If you have purchased the Sleepmotion 400i as part of a bedframe, please now refer to the bed assembly instruction.
If you have purchased a Sleepmotion Headboard please assemble to the bed at this point (the assembly instructions and fixing kit for your headboard can be found in the zipped compartment at the back of the headboard).

Back Up
Back Down
Back Massage
Foot Up
Foot Down
Foot Massage
Lumbar Up
Lumbar Down
Zero Gravity
Flat

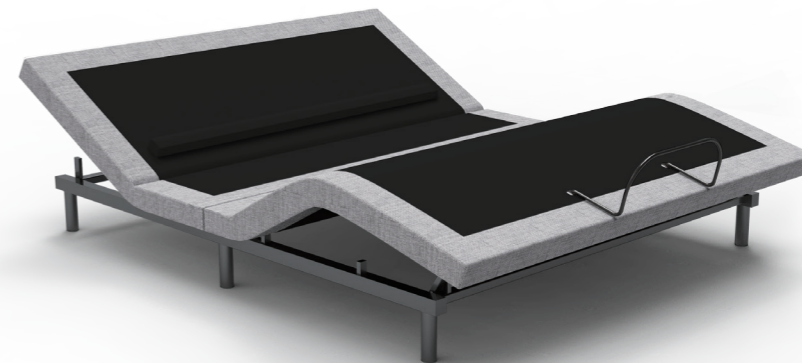

ELECTRONIC COMPONENTS INFORMATION

OVERVIEW

Electronic inputs is crucial important for the adjustable bed to function well. Please follow the instruction showed in image (i) / (ii) to connect the input cables.

i



ii



WARRANTY


ELECTRIC COMPONENTS

1- Year Full Warranty

Dreams will replace any electronic components if components fail during the 1 year from the date of delivery.


Maintenance and repair are to be only carried out by dreams or their recommended representatives.


ELECTRONIC COMPONENTS

N Back Motor  1 pc

O Foot Motor  1 pc

P Lumbar Motor  1 pc


L Pairing Cable  1 pc

Q Massage Motor  2 pcs

C Transformer  1 pc

M Control Box  1 pc

G Power Cord  1 pc

D Wireless Remote Control  1 pc


APP

To control the bed via and App please go onto the App store or Google Play and download 'Napp by Dreams'.

Once downloaded and registered 'Add Device' and then follow the instructions.


Once connected you will be able to control your Sleepmotion 400i via Napp by Dreams with the buttons shown in image (ii).

i

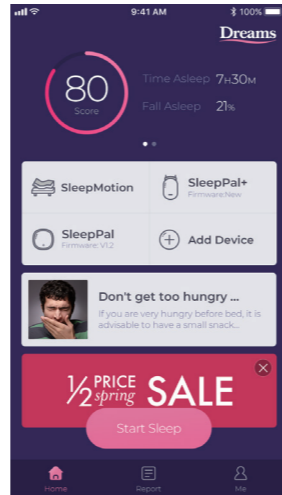


Home

ii

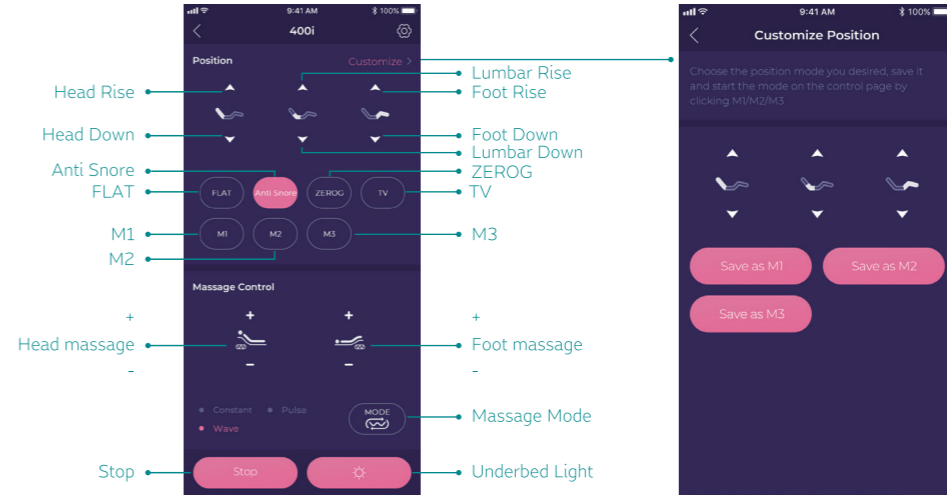

400i Control Page

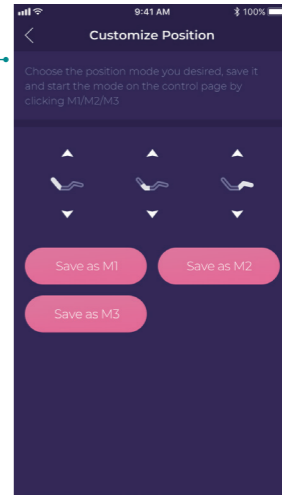

Customize Position

ADDITIONAL TROUBLE SHOOTING

IF ONE OR MORE FUNCTIONS OF THE BED HAVE STOPPED WORKING

Turn off and unplug, check under the bed base to verify the wired connections are secure and there are no cords or bedding obstructing the movement of the base.

THE REMOTE CONTROL WILL NOT OPERATE THE BED FUNCTIONS

Make sure the three (3) AAA batteries are installed correctly in the remote control. Ensure the remote control is successfully paired with the control box on the bed.

NO FUNCTIONS ON THE BED WILL OPERATE

Check to ensure the power cord is properly connected. Unplug the base for 1 hour to reset the electronic components. Plug base into a different electrical outlet, or test current outlet with another working appliance. A grounded electrical surge protector is recommended with use of this product.

FOR FURTHER ASSISTANCE CONTACT US AT: www.dreams.co.uk

Name of Manufacturer	: DREAMS
Address of Manufacturer	: Knares Beech, Loudwater, High Wycombe, HP10 9YU, United Kingdom.
Model / Designation	: Electrically Actuated Adjustable Bed
Type	: RM400i
Year of Manufacture	: 2020




Sleepmotion Base Correct Usage Guidelines

To stop any potential damage to your sleepmotion bed/motors please make sure you follow the below guidelines :


- When operating the back rise please make sure you are not sitting on the back section (image1). Your weight needs to be distributed in the laying position as below (image2).

(image1)



Back
Lumbar
Leg
Foot


(image2)



Back
Lumbar
Leg
Foot


- When operating the foot rise please make sure you are not sitting on the foot section (image3). Your weight needs to be distributed in the laying position as below (image4).

(image3)



Back
Lumbar
Leg
Foot

(image4)



Back
Lumbar
Leg
Foot

