
Dreams

Love your bed

Dreams OWNERS MANUAL

Love your bed

SLEEPMOTION 200i SPLIT UNIT

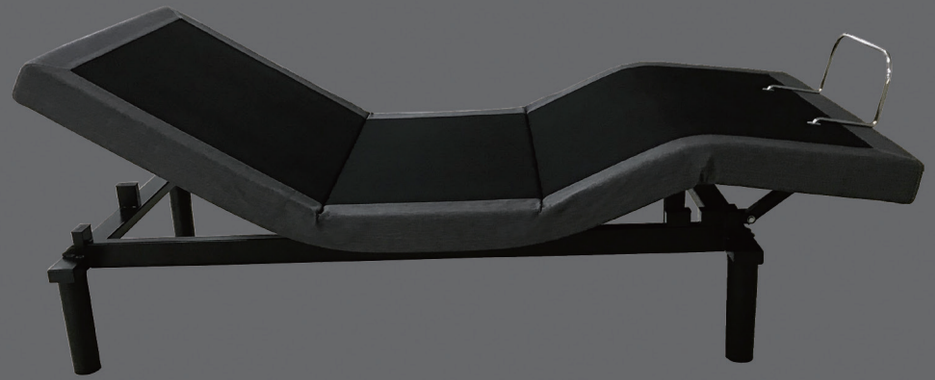

THANK YOU

Thank you for choosing the Sleepmotion 200i bed from Dreams. You have made a sound investment in our high quality Sleepmotion 200i which will hopefully help you relax & sleep better for many years to come. Please take a few minutes to read through this guide which will aid with assembling the product and how to use the features and benefits on the Sleepmotion 200i.

WARNINGS

IMPORTANT: PLEASE READ ALL SAFETY INSTRUCTIONS THOROUGHLY BEFORE USING THIS PRODUCT. PLEASE SAVE THESE INSTRUCTIONS IN A SAFE PLACE. FOR FUTURE REFERENCE.

ENSURE THIS PRODUCT IS PLACED ON A FLAT, CLEAN, DRY SURFACE.

ELECTRICAL SAFETY.

Always connect this product to a grounded surge protector and grounded standard 120-volt circuit wall outlet. DO NOT OPERATE THIS PRODUCT WHEN ANY OF THE CORDS OR ELECTRICAL UNIT IS DAMAGED. Keep all cords away from moving parts and any heated surfaces. FOR INDOOR USE ONLY. When moving or cleaning this product, turn off all electrical functions prior to unplugging from wall outlet.

SMALL CHILDREN/PETS

Immediately dispose of all packaging materials as soon as the product is unpacked. DO NOT ALLOW CHILDREN OR PETS TO PLAY ON OR UNDER THE BED. CHILDREN SHOULD NOT OPERATE THIS PRODUCT WITHOUT ADULT SUPERVISION.

IN-HOME USE / HOSPITAL DISCLAIMER

This product is designed solely for in-home use. This product is not designed to use as a hospital bed and does not meet hospital standards. Do not use with oxygen equipment or near explosive/flammable gases.

WEIGHT RESTRICTIONS

Recommended weight restrictions for PowerBases:
(all weights include the weight of the mattress and bedding)

This product will support the recommended weight limits when weight is distributed evenly across the base. This product is not designed to support or lift this amount in the head or foot sections alone. Consumers should not enter or exit the bed when any portion of it is in the raise position. Do not sit on the head or foot sections while in the raised position. Exceeding the recommended weight restrictions or other misuse of this product could damage the bed and void the warranty.

Weight Capacity: 355 kgs.

SOUND

Sounds does not exceed <70 DB.





PRODUCT RATINGS

IMPORTANT: USE THIS PRODUCT ONLY AS DESCRIBED IN THESE INSTRUCTIONS.DO NOT MODIFY ANY PARTS OR COMPONENTS.

MOTOR RATINGS

The Sleepmotion base motors are not designed to operate for more than two (2) continuous minutes within an eighteen (18) minute time period. Exceeding this rating will shorten the life of the motors, and will void the warranty.

POWER RATINGS

INPUT: AC 100-240V-50/60HZ, 1.5 Amp
OUTPUT: DC 29V-2A
FUSE: 1.5A 250V

If a short circuit should occur, switch off and remove the plug from the wall. The customer should seek professional assistance from a qualified electrician. DO NOT open any of the motor components, alter or change any wiring, modify the base, or change the product in any way, as it will void the warranty.

FCC COMPLIANCE

Operates on 2.4 GHz frequency transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To comply with the FCC RF exposure requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirement and void users right to operate the device.

For any questions or concerns regarding this product please visit ：

www.dreams.co.uk/help

Dreams
Love your bed

CONTENTS

This is a Sleepmotion base,which includes the functions of back up/down, foot up/down, zero gravity, anti-snore, TV position, memory, safety lock and flat.

Also,it could be controlled by wireless remote.

Please prevent the children from playing or operating the Sleepmotion base alone.

Overview 1-2

Assembly / Remote Control 3-14

Electronic Components Information 15-16

Split Unit Assembly/ Headboard Assembly 17-22

Test All Functions 23-24

Warranty / Electronic Components 25-26

Additional Trouble Shooting 27-30

OVERVIEW

STEP 1

Place the bed box in a desired location with the top of the box facing up.

STEP 2

Before discarding the packing materials, check to make sure all parts are included.
All electronics and components are located in boxes under the base or attached to the frame.

Note: Due to the weight this product is a 2 person build, to prevent injury please make sure there are 2 people present when assembling this product.

Dreams
Love your bed

A	Bed Base		1 pc
B	Retainer Bar		1 pc
C	Transformer		1 pc
D	Wireless Remote Control		1 pc
E	Washer		4 pcs
F	Legs	 3″ + 8″	each 4 pcs

G	Power Cord		1 pc
H	AAA Battery		2 pcs
I	Connecting Bolt		2 pcs
J	Hex Wrench		1 pc
K	Connecting Plate		1 pc
L	Extension Cord (connected to control box)		1 pc

ASSEMBLY

A	Bed Base		1 pc
E	Washer		4 pcs
F	Legs	3" + 8" 	each 4 pcs

There is a variable height option on the Sleepmotion 200i, either 8" or11". If you would like 8" please just use the larger leg supplied.

If you would like11" please connect the smaller leg (3") to the larger leg (8") before following the steps below.

If you have a headboard option use the specific holes in image (iv) and follow the headboard assembly in page 19-22

STEP 3


Place washer (E) on the leg (F), and then connect to bed base (A). Refer to image (i/ii/iii).

Note:

If you have purchased the Sleepmotion 200i as part of a bedframe please refer to the bed assembly instructions on what leg height to use.

The 3" leg should not be used individually.


i



ii



iii

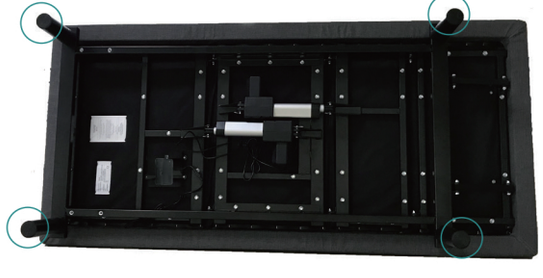

iv



ASSEMBLY

L	Extension Cord (connected to control box)		1 pc
C	Transformer		1 pc
G	Power Cord		1 pc


STEP 4

Insert Extension Cord into Transformer (C). Refer to image (i).


STEP 5

Insert Power Cord (G) into Transformer (C). Refer to image (ii).

i

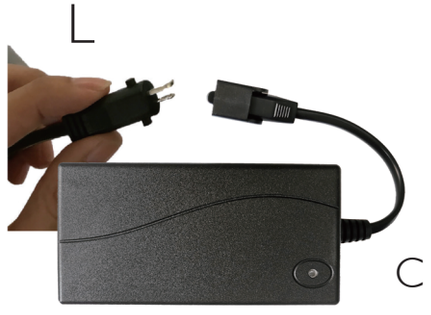

ii

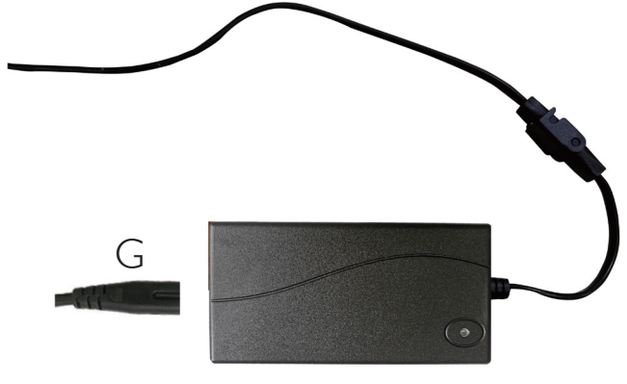

REMOTE CONTROL

D	Wireless Remote Control		1 pc
H	AAA Battery		2 pcs


OVERVIEW

All of the bed functions are controlled from the Remote Control (D). The Remote Control (D) comes with some pre-set positions. Refer to image (i) for a complete list of remote control functions.

REMOTE CONTROL BATTERY INSTALLATION:

Remove the battery cover on the back of Remote Control (D). Insert the AAA Batteries (H).

i

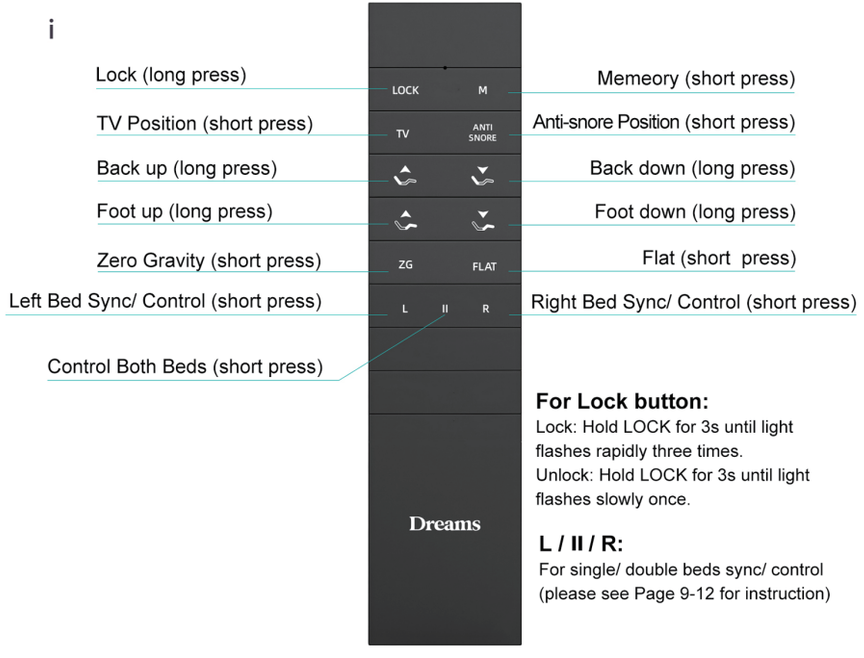

For Lock button:
Lock: Hold LOCK for 3s until light flashes rapidly three times.
Unlock: Hold LOCK for 3s until light flashes slowly once.

L / II / R:
For single/ double beds sync/ control (please see Page 9-12 for instruction)

Note: The ZG/TV/ANTI SNORE button shown are pre-programmed with the manufactures suggested bed positions. No programming is necessary by the user.

Attention please:
Long press operation: Back up/ down, Foot up/ down, Lock buttons.
One press operation for other buttons.
PRESS ANY BUTTON ON THE REMOTE STOP THE MOTION

Memory position setting way:
1. Adjust the back and foot to the position that you like.
2. Hold on "M" button for about 3 seconds, you will hear bleep sound.it's setted successfully.
3. After setting,just press"M" button once, it can reach to the memory position. If you want to reset to new memory position, just repeat the step above.


REMOTE CONTROL

PARING SET UP

ONE REMOTE TO CONTROL ONE BED

1.Have to turn off the power till the green light of Transformer off, then plug in.
Listen one beep, this indicates there is power to the control box.
2.Take the remote, press “L” button once.
3.Hold the "Back Down" and "Foot Up" buttons simultaneously to sync within 60s.
①One beep indicates pairing is successful.
②If there is three beeps, please repeat step 2-3 again.
You will hear one beep indicating pairing is successful.
Please do not press “R” button, it will not work on “R” button if you pair in “L” button as per the above steps.

Note: lt comes with pre-paired with “L” button. Do not need extra pairing for the new base.

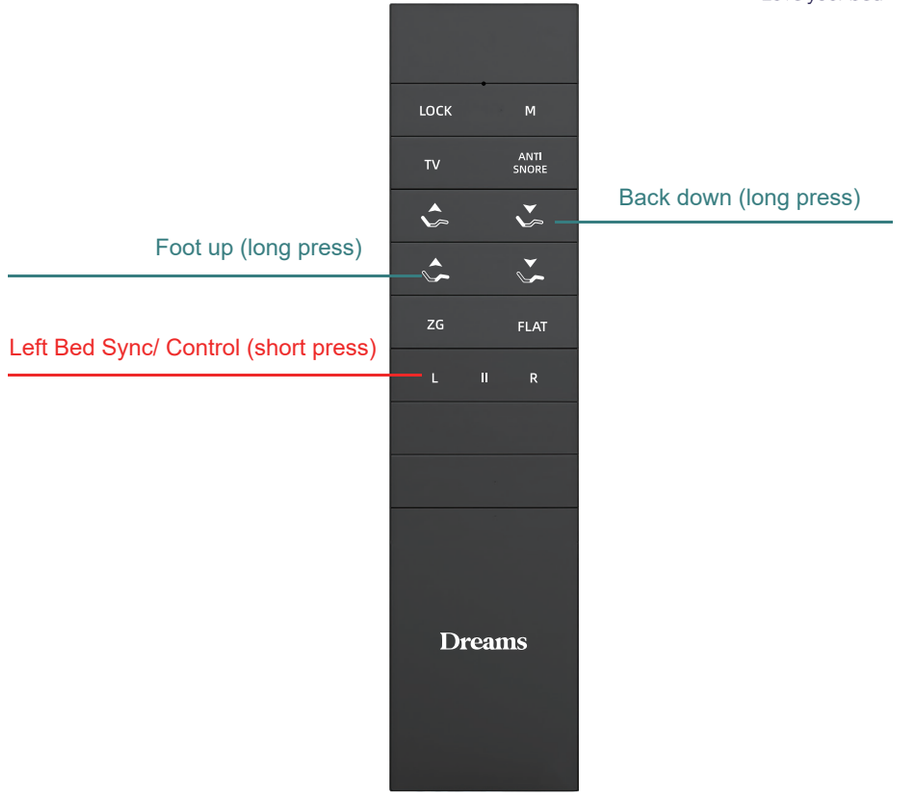

SYNC-ABLE CONTROL

PARING SET UP


ONE REMOTE TO CONTROL TWO BEDS

There are two beds, if you'd like to control two beds with only one remote (1st), pls follow instruction below:

Press remote (1st) to "R" button once, then pair it up with 2nd bed (please see Page 9-10 for instruction)
Once synced, press "L" button once to control 1st bed and "R" button to control 2nd bed.
Press "II" button to control both beds simultaneously.
Refer to image(i).

Note:
Every bed is fully paired up with its own remote, no pairing is necessary by the user.
For single bed, switch to "L" button and "II" to operate, "R" button will have no function.

i

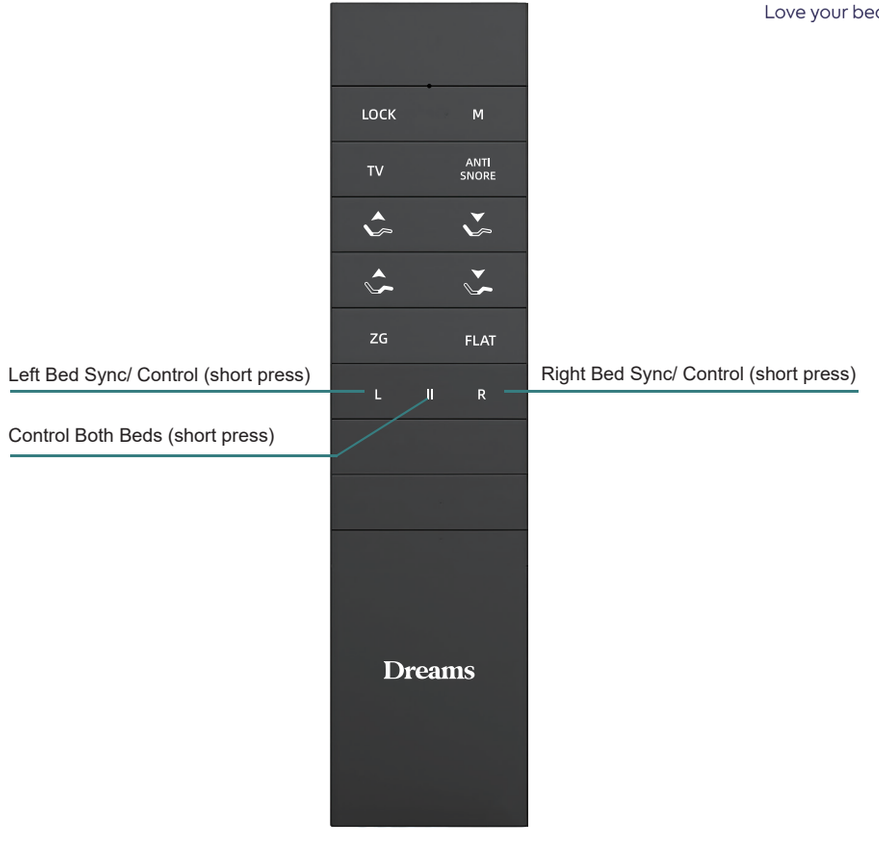

Dreams
Love your bed

ASSEMBLY

A	Bed Base		1 pc
B	Retainer Bar		1 pc

STEP 6

Turn over the whole base with legs standing on the floor,this a 2 man lift. Please refer to image (i).
Hold the metal frame when turning over the base, do not hold the upholstered frame only.

STEP 7

Insert the retainer bar (B) into 2 holes on the foot end of Bed Base (A). Refer to image (ii).


Note :

If you have purchased the Sleepmotion 200i as part of a bedframe, please now refer to the bed assembly instruction.
If you have purchased a Sleepmotion Headboard for Split Units Bed Base, please see page 19-22 for instruction.

i



ii

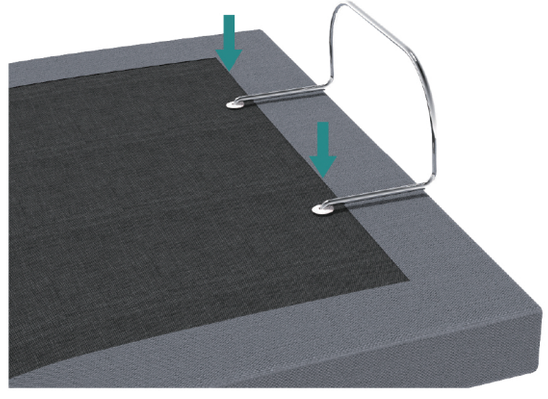


ELECTRONIC COMPONENTS INFORMATION

OVERVIEW


All electronic components are pre-installed. How ever,
some input locations are important for proper set up and functionality.
Refer to image (i) and (ii) to familiarise yourself for correct setting and part locations.

i

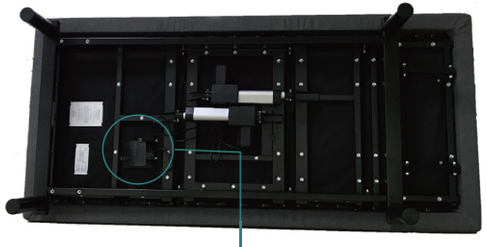

ii



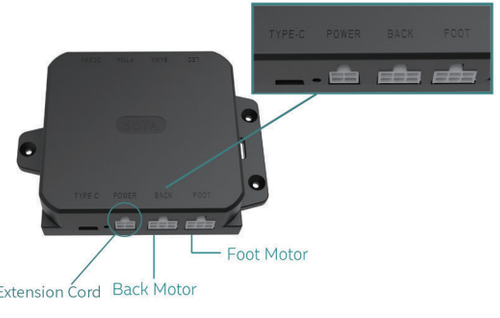

SPLIT UNIT ASSEMBLY

Contents:

A	Bed Base		2 pcs
I	Connecting Bolts		2 pcs
J	Hex Wrench		1 pc
K	Connecting Plate		1 pc

STEP I

Slide the 1st bed base and 2nd bed base together so that the holes line up. Refer to image (i)


STEP 2

Align the holes of the Connecting Plate (K) and Bed Bases. Secure by tightening Connecting Bolts (I) with Wrench (J). Refer to image (ii)(iii)

i



ii

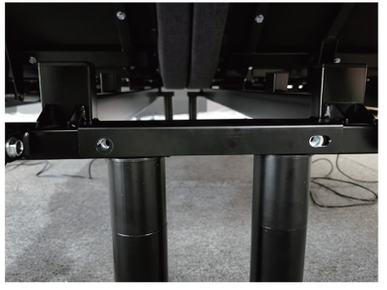

iii



Dreams
Love your bed

HEADBOARD ASSEMBLY

STEP 1

Open carton and remove headboard

STEP 2

Un-zip the back of headboard and remove the box

STEP 3

Remove components and check parts

2 x Headboard Bracket
8 x Bolts
1 x Allen Key


Note :

The components to assemble headboard are in the box of the headboard back. Refer to image (ii)

i



ii

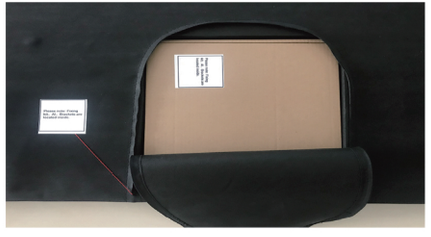

iii



HEADBOARD ASSEMBLY

STEP 4

Fix the headboard brackets to the base.Refer to image(i)(ii)

STEP 5


Install the headboard brackets to the Headboard Refer to image(iii)(iv)

Note :

To ensure an easier assembly, we strongly advise that all fittings should not be tightened during initial assembly.

Dreams
Love your bed

i

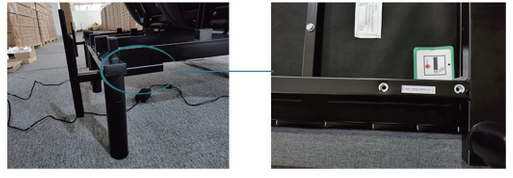


ii



iii



iv

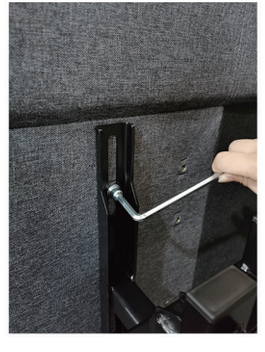

TEST ALL FUNCTIONS

OVERVIEW

To ensure proper setup, use remote and test all functions for three (3) seconds.

Note: If you purchase Sleepmotion base together with bedframe, the Sleepmotion should be assembled first and then bedframe assembled round it.

Dreams
Love your bed

Back Up

Back Down

Foot Up

Foot Down

Zero Gravity

Flat

Anti-snore

TV Position

Memory

Lock



WARRANTY

ELECTRIC COMPONENTS

1- Year Full Warranty
Dreams will replace any electronic components if components fail during the 1 year from the date of delivery.

Maintenance and repair are to be only carried out by dreams or their recomended representatives.

ELECTRONIC COMPONENTS

C	Transformer		1pc	M Back Motor	 1pc
D	Wireless Remote Control		1pc	N Foot Motor	 1pc
G	Power Cord		1pc	O Control Box	 1pc
L	Extension Cord (connected to control box)		1pc		

ADDITIONAL TROUBLE SHOOTING

IF ONE OR MORE FUNCTIONS OF THE BED HAVE STOPPED WORKING

Turn off and unplug,check under the bed base to verify the wired connections are secure and there are no cords or bedding obstructing the movement of the base.

THE REMOTE CONTROL WILL NOT OPERATE THE BED FUNCTIONS

Make sure the two (2) AAA batteries are installed correctly in the remote control.
Ensure the remote control is successfully paired with the control box on the bed.

NO FUNCTIONS ON THE BED WILL OPERATE

Check to ensure the power cord is properly connected. Unplug the base for10 mins to reset the electronic components. Plug base into a different electrical outlet, or test current outlet with another working appliance. A grounded electrical surge protector is recommended with use of this product.

FOR FURTHER ASSISTANCE CONTACT : www.dreams.co.uk/help

Name of Manufcaturer	: DREAMS
Address of Manufcaturer	: Knaves Beech, Loudwater, High Wycombe, HP10 9YU, United Kingdom.
Model / Designation	: Electrically Actuated Adjustable Bed
Type	: 200i
Year of Manufacture	: 2025


CE

Sleepmotion Base Correct Usage Guidelines


To stop any potential damage to your sleepmotion bed/motors please make sure you follow the below guidelines :

1. When operating the back rise please make sure you are not sitting on the back section (image1). Your weight needs to be distributed in the laying position as below (image2).

(image1)




(image2)

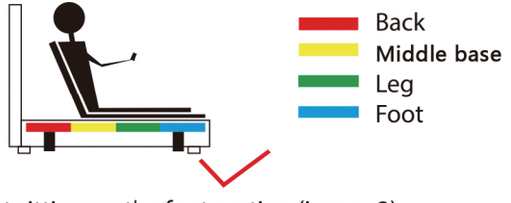


2. When operating the foot rise please make sure you are not sitting on the foot section (image 3). Your weight needs to be distributed in the laying position as below (image 4).

(image3)



(image4)

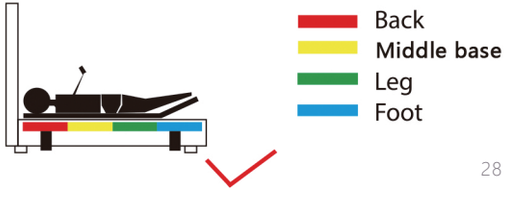

NOTES:

Dreams
Love your bed

NOTES: